



Für einen entsprechenden normgerechten Unterbau, die fachgerechte Montage der Bodendose (max. Belastung 50kN) sowie entsprechende Drainagierung hat der Kunde zu sorgen.

Customer has to take care of professional foundation and mounting of underfloor distributor systems (max load capacity 50kN) as well as professional connection to drainage system.

Fondation correspondante aux normes selon la charge admise (max. 50kN) et drainage nécessaire à faire par le client.

Per una corrispondente sottostruttura a norma, la corretta installazione del pozzetto (carico max. 50kN) come anche un drenaggio adeguato è a favore del cliente.

Schnappverschluss  
snap lock  
verrouillage à pression  
chiusura a pressione

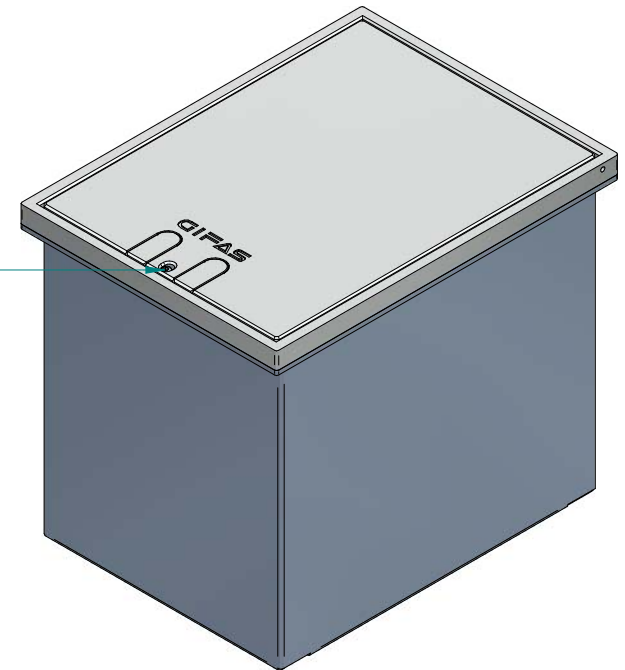

**GIFAS**  
ELECTRIC

GIFAS-ELECTRIC GmbH  
Dietrichstrasse 2 - CH-9424 Rheineck  
+41 71 886 44 44 info@gifas.ch  
+41 71 886 44 44 www.gifas.ch

**Unterflurelektrant**

**Fonto 9301**

**2x BS IP66 / GCC**

Art.-Nr. : **860866**

30.08.2022

Blatt 1/1  
beku