



PrimaLED 2 LED floodlight



The proven concept of the PRIMA is now available with the innovative LED technology. With this lighting system you benefit from all the LED technology advantages!
 The PrimaLED is a technically sophisticated, professional light with excellent light output, low heat generation and low energy consumption.
 This working lamp guarantees optimised floodlighting with glare-free, evenly distributed light. It also offers various setup options for any application: hanging, lying or standing!

Product properties

- full light flux available immediately
- low energy consumption with a high light yield
- minimal temperature development
- extremely switching-resistant (> 1 million)
- maintenance-free
- no UV/IR radiation
- yellow housing made from impact-resistant polycarbonate with black rubber edges providing shock and impact protection
- carrying handle also serves as a support which, when engaged, moves the lights to the desired position
- satinated bulb cover made from Makrolon: shock and impact resistant, seals housing to make it water- and dust-proof
- luminary with reduced surface temperature for a usage in fire risk industrial establishments.

Technische Daten

Technical data

Operating voltage:	230 VAC/24 VAC
System performance:	25.2 W
Luminous flux:	4'200 lm
Light efficiency:	165 lm/W
Light temperature:	4'000 K
Protection class:	I (230 V with socket) II (230 V without socket) III (24 V)
Protection category:	IP65 (without socket) IP54 (with socket)
Impact resistance:	IK08
Power supply:	mains connection
Temperature range:	-20° C to +40° C
Weight:	3.1 kg
Dimensions (W×H×D):	305×295×110 mm



IP55



230 VAC, with built-in socket

230357	PrimaLED 2, 230 V/25.2 W, 4'200 lm, excl. feed-in cable with built-in socket T13
✓ 228219	PrimaLED 2, 230 V/25.2 W, 4'200 lm, incl. feed-in cable 5 m, 3×1.0 mm ² , T13 with built-in socket T13
✓ 228220	PrimaLED 2, 230 V/25.2 W, 4'200 lm, incl. feed-in cable 10 m, 3×1.0 mm ² , T13 with built-in socket T13



IP65



230 VAC, without built-in socket

✓ 228221	PrimaLED 2, 230 V/25.2 W, 4'200 lm, incl. feed-in cable 5 m, 2×1.0 mm ² , T11 without built-in socket
✓ 228222	PrimaLED 2, 230 V/25.2 W, 4'200 lm, incl. feed-in cable 10 m, 2×1.0 mm ² , T11 without built-in socket
✓ 870015	PrimaLED 2, 230 V/25.2 W, 4'200 lm, excl. cable, M20, without socket




IP65



24 VAC/DC

210261	PrimaLED 2, 24 V/25.2 W, 4'200 lm, incl. feed-in cable 5 m, 2×2.5 mm ² , CEE16/2 without built-in socket
210262	PrimaLED 2, 24 V/25.2 W, 4'200 lm, incl. feed-in cable 10 m, 2×2.5 mm ² , CEE16/2 without built-in socket
✓ 870016	PrimaLED 2, 24 V/25.2 W, 4'200 lm, IP65 without feed-in cable, M20 without built-in socket

Dimensions

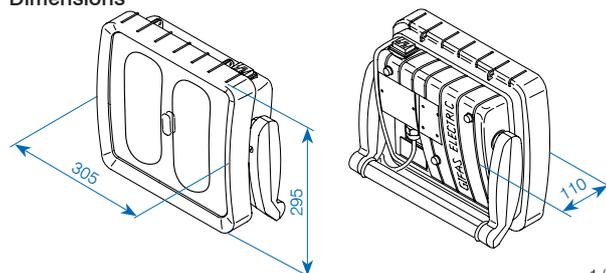

✓ from stock, offer subject to prior sale